

I-1312**Impactor**

Impactor I-1312


**Features:**

- ◆ Cedarapids 5048LP Impact chamber
- ◆ Inlet opening 1100x1240mm (43x48")
- ◆ Rotor size: Ø1270x1220mm(50x48")
- ◆ Hydrostatic drive
- ◆ Deutz BF6M CP 314kW (421HP) @ 2100 rpm
- ◆ Rapid set up time
- ◆ Advanced electronic control system

Options to include:

- ◆ Bypass Conveyor
- ◆ Overband Magnet
- ◆ Belt Weigher
- ◆ Radio Remote Control for machine movement

QUARRYING**RECYCLING****DEMOLITION**

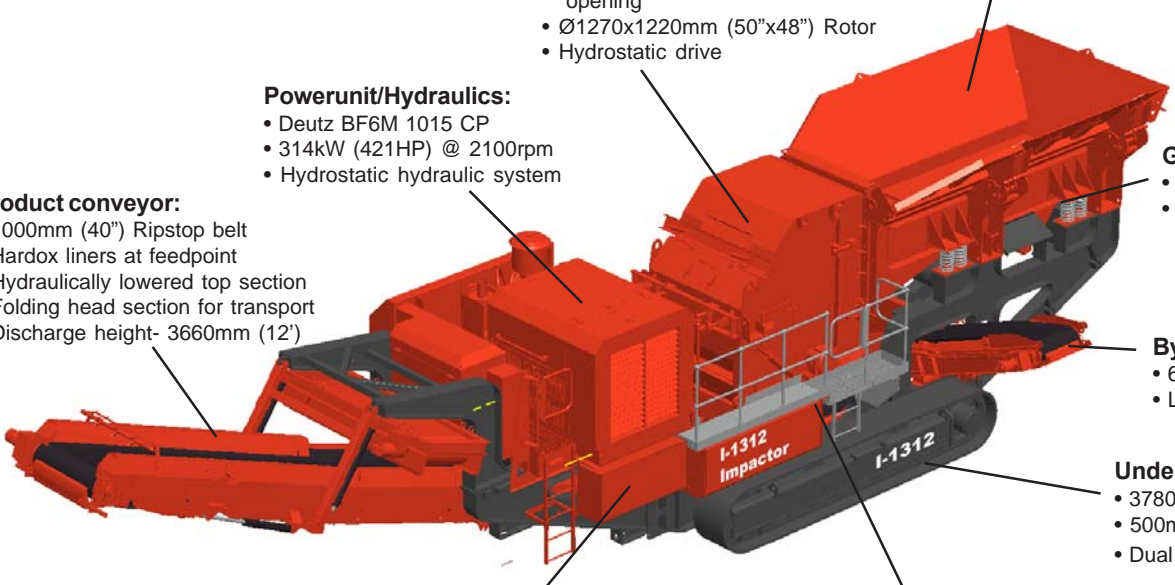Impact Chamber:

- Cedarapids 5048LP
- 1100x1240mm (42"x48") inlet opening
- Ø1270x1220mm (50"x48") Rotor
- Hydrostatic drive

Hopper:

- 9m³ (11.7yd³) Capacity
- Hydraulic folding sides
- Hardox side walls

Powerunit/Hydraulics:

- Deutz BF6M 1015 CP
- 314kW (421HP) @ 2100rpm
- Hydrostatic hydraulic system

Product conveyor:

- 1000mm (40") Ripstop belt
- Hardox liners at feedpoint
- Hydraulically lowered top section
- Folding head section for transport
- Discharge height- 3660mm (12')

Grizzly feeder:

- Integral screen
- Direct hydraulic drive

By-pass conveyor:

- 650mm (26") belt
- Left or right discharge

Undercarriage:

- 3780mm (12' 5") Centres
- 500mm (20") shoe
- Dual speed


Electronic control system:

- Advanced CANBUS compliant system
- Large operators screen (IP67 rated)
- Five simple operating modes with menu driven graphic user interface

Catwalks:

- Access to all key areas
- Fully galvanised

Working Position

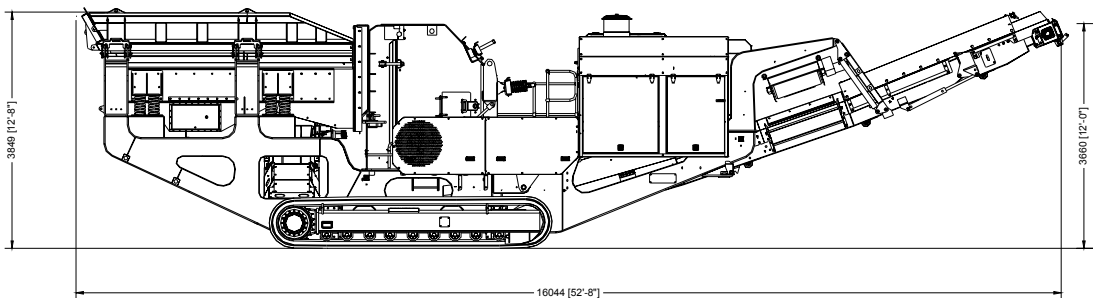

Transport Dimensions: 14.8m (48' 8") Long x 2.9m (9' 6") Wide x 3.65m (11' 7") High

For further information on the Finlay Company and their machines contact:

TEREX Finlay

Drumquin Road, Omagh, Co.Tyrone, N. Ireland, BT78 5PN
 Tel: +44 (0) 28 82 418 700
 Fax: +44 (0) 28 8224 4294(Sales) 8224 3487(Spares) 8225 2740(Technical)
 Email: Mail@finlayhydrascreens.com - Web Site : www.finlayhydrascreens.com

All specifications subject to change without prior notification.